

Hardfacing cored wire

Classification

DIN 8555-83

:MF2-GF-55-GP

General description


Hard-Revishield®55-GP- is a self shielded, open arc, flux cored tubular electrode designed to provide a hardfacing overlay on new or old steel components. Although, Hard-Revishield®55-GP is primarily designed for the open arc operation, it may be used under a neutral flux for conditions requiring spatter elimination and removal of arc glare. A long stickout for maximum efficiency and minimum penetration.

Application

Hard-Revishield®55-GP produces a martensitic and some retained austenite deposit with a hardness range of 50-59HRc. This microstructure makes Lincore 55 particularly suitable for applications involving sliding, rolling and metal to metal wear, coupled with resistance to mild abrasion.

Typical applications

Crane and mine car wheels
Gear teeth
Skip guides
Dredger buckets
Scraper blades
Transfer tables
Cable sheaves

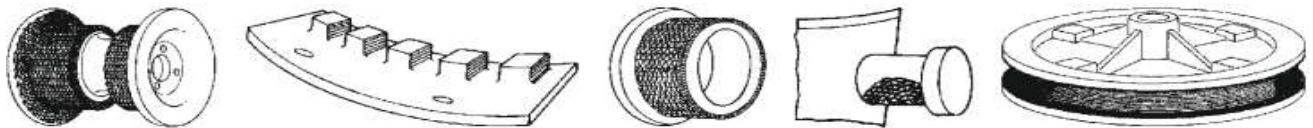

Mechanical properties, all weld metal

Typical hardness values

| | |
|------------------------------------|-----------|
| Layer 1 | 50-59 HRc |
| Layer 2 | 50-59 HRc |
| Welded on Mild Steel Plate (12 mm) | |

Packaging, available sizes and indentation

| Unit type | Net weight/unit (kg) | Diameter (mm) | | |
|------------|----------------------|---------------|-----|-----|
| | | 1.1 | 1.6 | 2.0 |
| Spool 14C | 6.35 | | | X |
| Spool 22RR | 10 | | | X |
| Spool 22RR | 11.34 | X | | |
| Spool 50C | 22.8 | | | X |

Identification Imprint: Hard-Revishield®55-GP

Hard-Revishield®55-GP: rev. EN 20

Additional information

All work-hardened base material and previously deposited hardfacing material should be removed prior to applying a new deposit, since such areas are prone to embrittlement and possible cracking.

A preheat of up to 250°C is necessary to prevent cracking in situations of high restraint and/or heavy thicknesses. Interpass temperatures between 150 - 300°C do not adversely effect deposit hardness. The deposit thickness is usually limited to 2 layers on high carbon or alloy steels and/or situations of high restraint and heavy sections due to the risk of cracking. Higher preheat and interpass temperatures coupled with slow cooling will minimise the risk of cracking.

The weld metal is not machinable by conventional methods although the deposit can be shaped by grinding.

The deposit can be softened by annealing at 875°C for one hour and slow cooling (air cool 22- 43HRC, furnace cool 15-17HRC). The hardness can be restored by heating at 875°C followed by water quenching (50-59HRC). The component should then be tempered at 150-200°C for one hour (54-59HRC) to retain some toughness.

Welding positions



ISO/ASME PA/1G

Current type

DC +

Chemical composition (w%) typical, all weld metal

| C | Mn | Si | Cr | Al | Mo |
|------|-----|------|-----|-----|-----|
| 0.45 | 1.4 | 0.55 | 5.3 | 1.4 | 0.8 |

Structure

In the as welded condition the microstructure consists mainly of martensite with some retained austenite

Calculation Data

| Diameter mm | Wire Feed Speed (cm/mm) | Current (A) | Arc Voltage (B) | Deposition Rate (kg/h) | Efficiency, % |
|----------------|----------------------------|----------------|-----------------|---------------------------|---------------|
| 1.1 | 5.1 to 15.2 | 85-165 | 25-31 | 1.6-4.3 | 80-85 |
| 1.6 | 3.8 to 8.9 | 125-245 | 26-32 | 2.2-5.5 | 79-84 |
| 2.0 | 3.2 to 6.4 | 190-330 | 24-30 | 3.2-6.2 | 87-86 |

Complementary products

Complementary products include Elehard®55-G and Elehard®60-GPS.